
GPO

GERMAN · PRECISION · OPTICS

SPECTRA™ RIFLESCOPES

Technical Information

SPECTRA™ 4,5-27x50i LR Pro | FFP

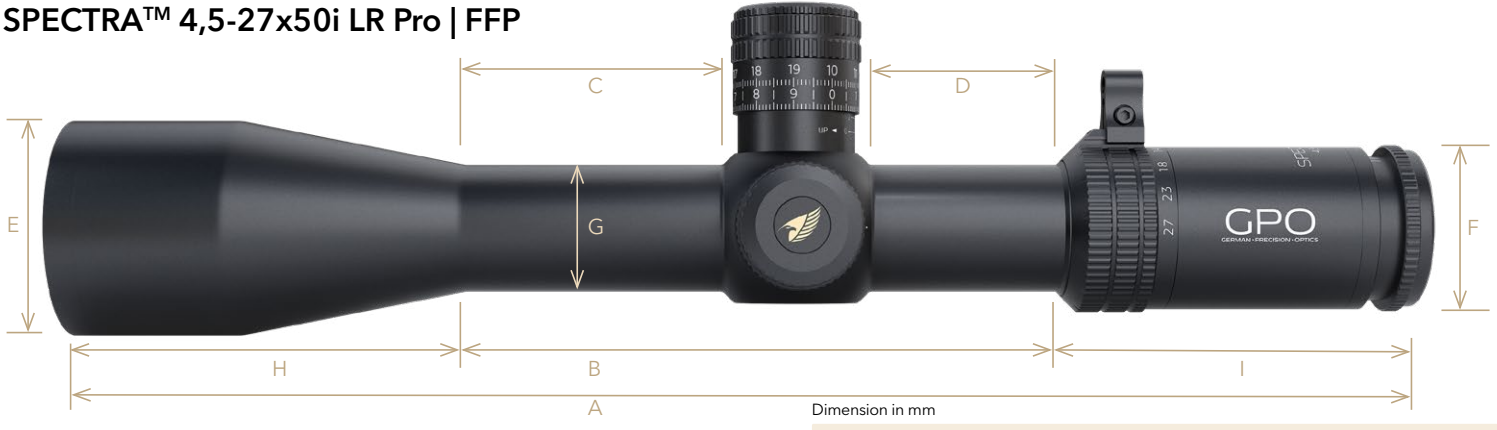


Dimension in mm

SPECTRA™ 4,5-27x50i LR Pro	A	B	C	D	E	F	G	H	I
	361,2	159,4	68,3	52,4	57,5	43,5	34	105,2	89

SPECTRA™ 4,5-27x50i LR Pro | FFP

Magnification	.	4,5x - 27x
Field of View (FOV) m at 100m	.	7,4 - 1,3
Objective diameter (mm)	Effective diameter	50
Exit pupil diameter (mm)	Measurem. of the pupilary ocular beam	9,5 - 1,9
Eye relief (inches)	From the last optical surface	3,94
Eye relief (mm)	From the last optical surface	100
Travel value per click at 100m	1 click =x/100m	1
Elevation range total (cm at 100m)	100m	280
Windage range total (cm at 100m)	100m	280
Parallax compensation	.	25m - ∞
Diopter adjustment range (dpt)	.	-2 /+2
Transmission daylight	ISO 14490-5:2005	91%
Height (inches)	Without covers	2,52
Height (mm)	Without covers	64
Width (inches)	At outside diameter	3,72
Width (mm)	At outside diameter	94,5
Length (inches)	Fully extended	14,22
Length (mm)	Fully extended	361,2
Tube diameter (mm)	.	34
Weight (oz)	Without cover	31,04
Weight (gram)	Without cover	880
Reticle options	.	LR Pro
Dimensions internal thread	Objective mm	M54x0,75

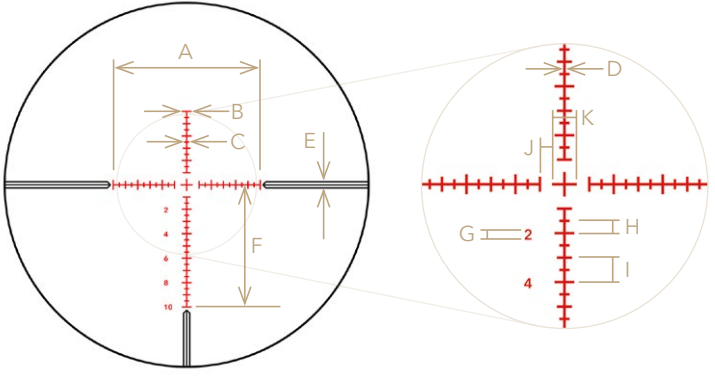

Coverage in cm / 100 Meter at 27x

SPECTRA™ 4,5-27x50i LR Pro	Reticle	A	B	C	D	E	F	G	H	I	J	K
	LR Pro	120	6	4	0,5	5	100	4	5	10	5	10